

1. Abstract

H43A-I is a I2C interface 4.3 inch TFT color display module. Module with 128M bit memory, can store BMP image and resource file. With the flexible interface mode and simple and convenient operation instructions, the whole man-machine interactive graphical interface can be formed by touch screen.

(1) built in memory capacity: 128Mbit

Font occupied 16Mbit, the remaining space 112Mbit used to store resource data.

(2) integrated graphics function

LCDs to send commands and coordinate parameters, can be achieved in point, line, square, round, button, form, edit box display. Contains text, buttons, edit box, check box, slider, thermometer, water level meter, curve waveform, ruler, battery and other controls Object.

2. Description

no	Item	Standard value	Unit	Remarks
1	Display dot matrix number	480*RGB*272	Dots	
2	LCD Size	4.3	inch	
3	LCM Exterior dimension	72(L)*122(W)	mm	
4	Dynamic display area	59(L)*100(W)	mm	
5	Pixel size	0.18(L)*0.18(W)	mm	
6	Pixel component	a-Si TFT		
7	LCD mode	65 k TFT		16 bit color
8	visual angle	12 o'clock		
9	Backlight	White led		
10	Module power supply	5	V	


Maximum product rating:

Item	Symbol	MIN	Typical	MAX	Unit	Remarks
Operating temperature	Top	-20	-	+70	°C	
Storage temperature	Tst	-30	-	+80	°C	
Supply voltage	VDD	-0.3	-	5.4	V	
Input voltage	Vin	-0.3	-	VDD+0.3	V	According to the input voltage


Product electrical characteristics:

Item	Symbol	MIN	Typical	MAX	Unit	Remarks
Working voltage	VDD	4.5	5.0	5.4	V	5V power supply
Operating current	I	160	180	190	mA	Backlight on
	I	100	128	135		Backlight off


3. Structure and pin

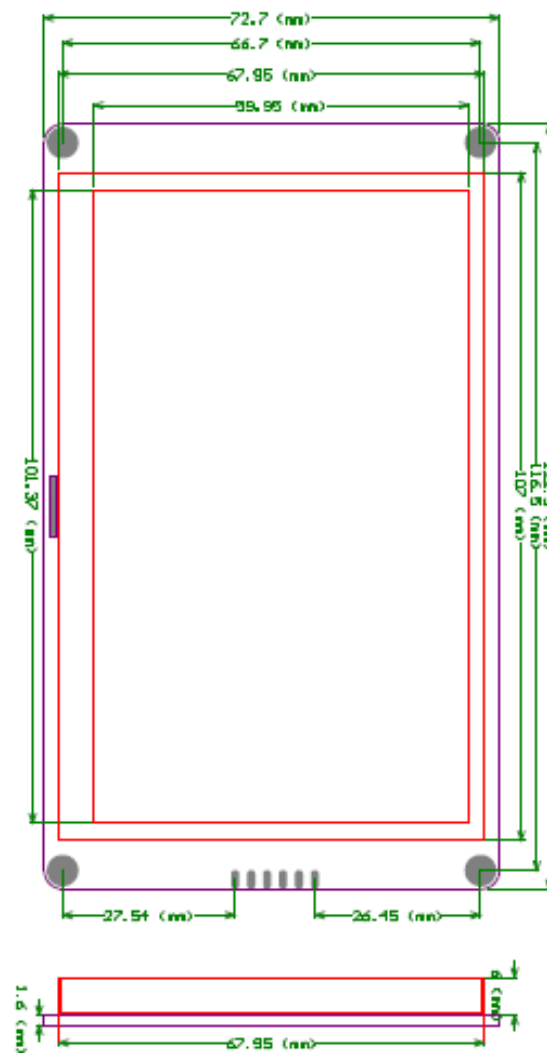

4.I2C interface timing diagram:

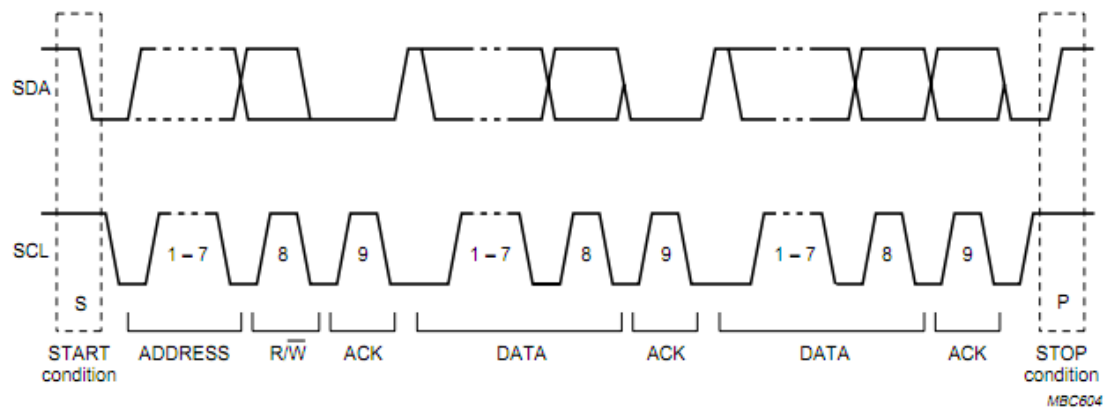


A complete data transfer.

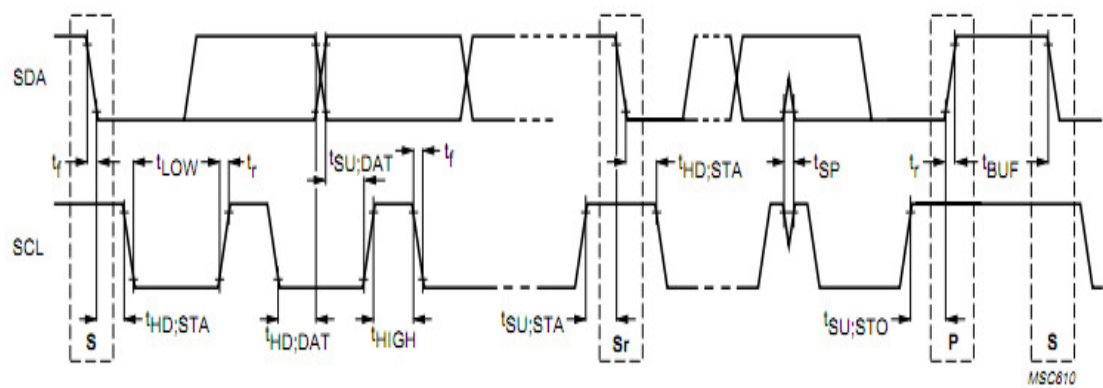


AC parameter:

PARAMETER	SYMBOL	STANDARD-MODE		UNIT
		MIN.	MAX.	
SCL clock frequency	f_{SCL}	0	100	kHz
Hold time (repeated) START condition. After this period, the first clock pulse is generated	$t_{HD;STA}$	4.0	–	μs
LOW period of the SCL clock	t_{LOW}	4.7	–	μs
HIGH period of the SCL clock	t_{HIGH}	4.0	–	μs
Set-up time for a repeated START condition	$t_{SU;STA}$	4.7	–	μs
Data hold time: for CBUS compatible masters (see NOTE, Section 10.1.3) for I ² C-bus devices	$t_{HD;DAT}$	5.0 0 ⁽²⁾	– 3.45 ⁽³⁾	μs μs
Data set-up time	$t_{SU;DAT}$	250	–	ns
Rise time of both SDA and SCL signals	t_r	–	1000	ns
Fall time of both SDA and SCL signals	t_f	–	300	ns
Set-up time for STOP condition	$t_{SU;STO}$	4.0	–	μs
Bus free time between a STOP and START condition	t_{BUF}	4.7	–	μs
Capacitive load for each bus line	C_b	–	400	pF
Noise margin at the LOW level for each connected device (including hysteresis)	V_{nL}	0.1V _{DD}	–	V
Noise margin at the HIGH level for each connected device (including hysteresis)	V_{nH}	0.2V _{DD}	–	V

5.I2C device address is 0x77.

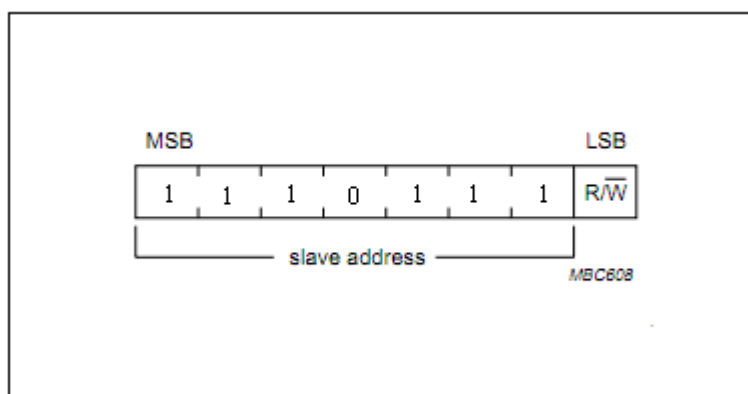

6. Control and download interface

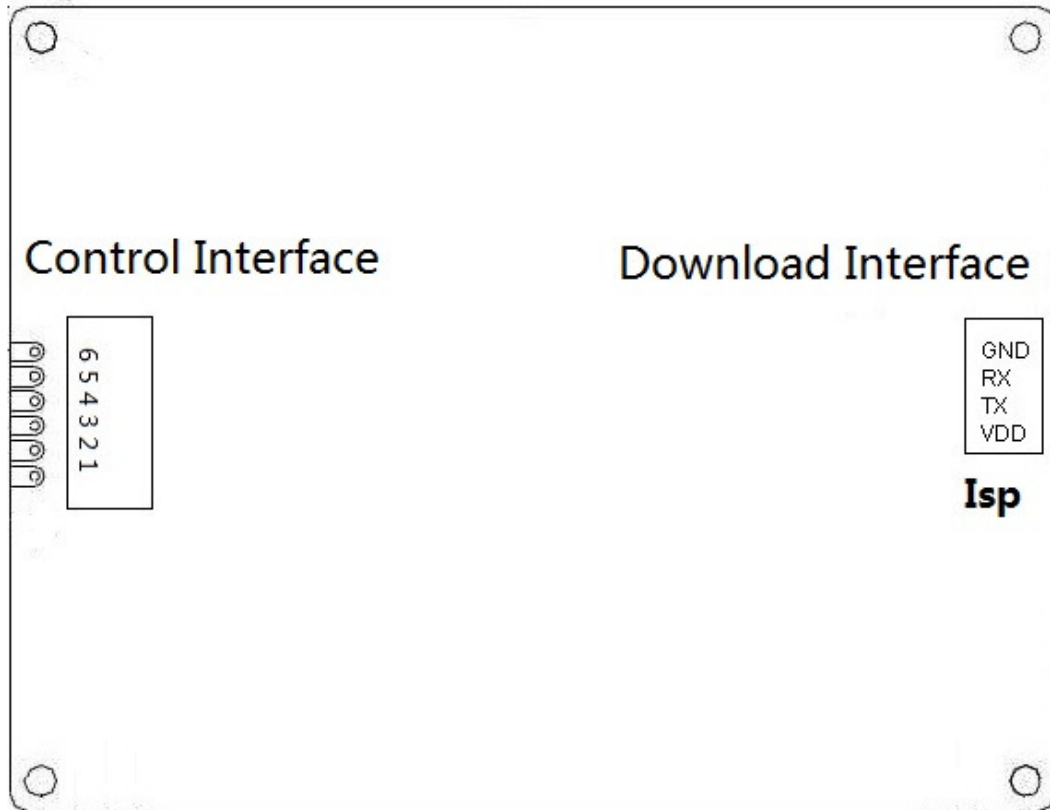

I2C control interface specification:


Item	Interface name
1	VDD power
2	GND ground
3	SDA Serial data
4	SCL Serial clock
5	INT interrupt
6	NC

Download interface description:

Item	Interface name
1	VDD power
2	TX Serial transmission
3	RX Serial reception
4	GND ground


Note: download interface the default serial communication baud rate is 921600 KBPS

7.I2C read interface from H35B-I

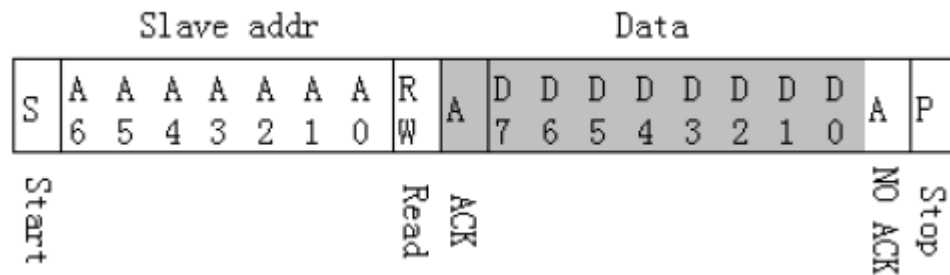

8.Interrupt signal from H35B-I to host

Host need to use both interrupt control signal and serial data interface to get the H35B-I data.
Here is the timing to get H35B-I data:

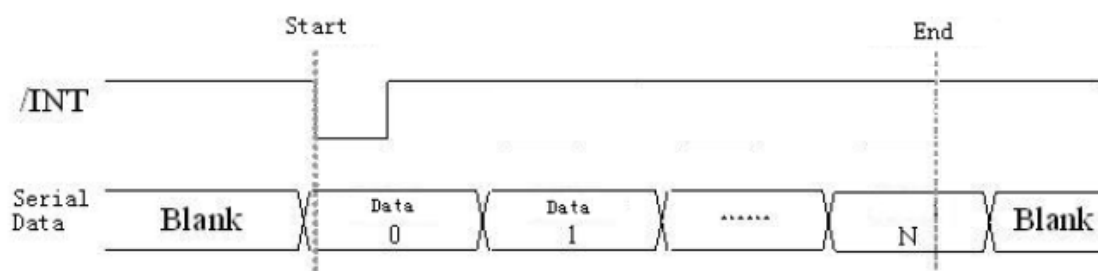

Host use specified Instruction to read H35B-I data. H35B-I will send host a interrupt signal when there is a valid Instruction. Then host can use the serial data interface to get the H35B-I data. If there is no valid touch detected or valid Instruction, the /INT will not be pulled low, the host do not need to read the H35B-I data.

As for interrupt trigger style, /INT signal will be low if there is valid touch detected. But for per update of valid touch data, H35B-I will produce a valid pulse for /INT signal, host can read the touch data periodically according to the frequency of this pulse. In this style, the pulse frequency is the touch data update frequency and read valid Instruction data.

